


Ø.75 THRU-6 HOLES  
EQUALLY SPACED ON A  
Ø9.375 B.C.

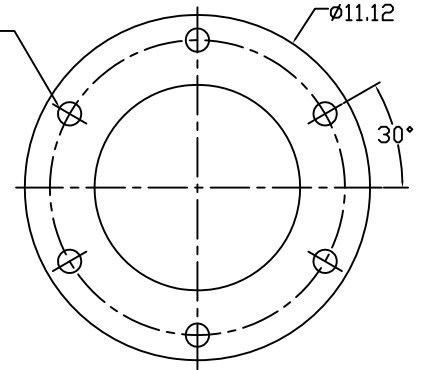

SECTION A-A

MANUFACTURED IN COMPLIANCE WITH AMERICAN  
WATER WORKS ASSOCIATION, WET-BARREL FIRE  
HYDRANT STANDARD, AWWA C-503

PARTS LIST:

ID	PART NAME	MATERIAL
1	HYDRANT HEAD	ASTM B584 ALLOY C89833 OR C87600
2	HOSE CAPS	PLASTIC or BRONZE
3	HYDRANT STEM	SILICON BRONZE ASTM B584 C87600
4	STEM LOCKNUT	BRASS ASTM B584 ALLOY C89833
5	BEVELED HYDRANT DISC	BUNA-N
6	HYDRANT DISC LOCKNUT	BRASS ASTM B584 ALLOY C89833
7	STEM INSERT	BRASS ASTM B584 ALLOY C89833
8	PENT NUT	SILICON BRONZE ASTM B584 C87600
9	PENT NUT RETAINER	COPPER ALLOY UNS C83600
10	HYDRANT DISC HOLDER	BRASS ASTM B584 ALLOY C89836
11	NOZZLE GASKET	NEOPRENE
12	SPOOL	ASTM B584 ALLOY C89833 OR C87600
13		
14		

PRODUCT FEATURES:

	FEATURE DESCRIPTION
1	MEETS OR EXCEEDS ANSI/AWWA C503
2	INDIVIDUAL STEM OPERATION
3	LIMITED NUMBER OF INTERNAL PARTS
4	PRODUCT RATED UP TO 200 PSI; HYDROSTATICALLY TESTED AT 400 PSI
5	AVAILABLE IN A VARIETY OF BOLT HOLE PATTERNS
6	LOW ZINC SILICON BRONZE STEMS
7	HEAVY DUTY DISC HOLDER
8	O-RING CONSTRUCTION IN STEM INSERT
9	PENT NUTS SIZES AVAILABLE; 1-1/8", 1-1/2", 1-3/4"
10	PLASTIC CAPS AVAILABLE
11	10 YEAR LIMITED WARRANTY
12	VARIOUS OUTSIDE FINISHES AVAILABLE
13	NOZZLE THREADS CONFORM TO NFPA 1963, NH/NST
14	

Approvals:

Date: