



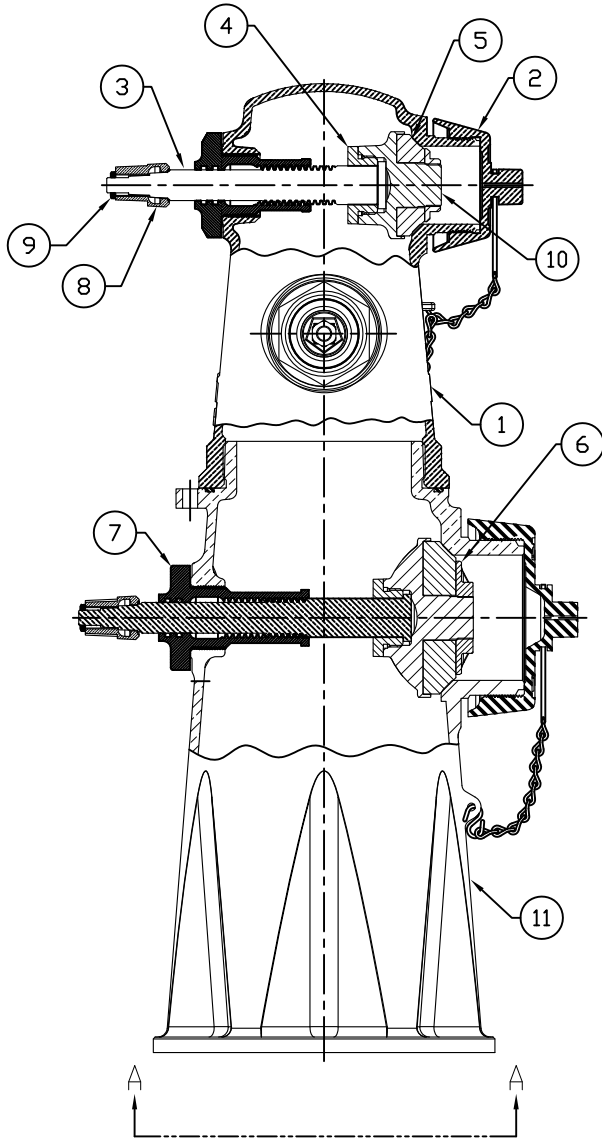

Ø.75 THRU-6 HOLES
EQUALLY SPACED ON A
Ø9.375 B.C.

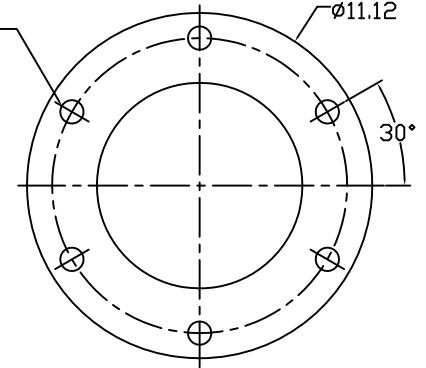

SECTION A-A

MANUFACTURED IN COMPLIANCE WITH AMERICAN
WATER WORKS ASSOCIATION, WET-BARREL FIRE
HYDRANT STANDARD, AWWA C-503

PARTS LIST:

ID	PART NAME	MATERIAL
1	HYDRANT HEAD	ASTM B584 ALLOY C89833 OR C87600
2	HOSE CAPS	PLASTIC or BRONZE
3	HYDRANT STEM	SILICON BRONZE ASTM C87600
4	STEM LOCKNUT	ASTM B584 ALLOY C89833
5	BEVELED HYDRANT DISC	BUNA-N
6	HYDRANT DISC LOCKNUT	ASTM B584 ALLOY C89833
7	STEM INSERT	ASTM B584 ALLOY C89833
8	PENT NUT	SILICON BRONZE ASTM C87600
9	PENT NUT RETAINER	COPPER ALLOY UNS C83600
10	HYDRANT DISC HOLDER	BRASS ASTM B584 ALLOY C89836
11	HYDRANT SPOOL	ASTM B584 ALLOY C89833 OR C87600
12		
13		
14		
15		

PRODUCT FEATURES:

	FEATURE DESCRIPTION
1	INDIVIDUAL STEM OPERATION
2	LIMITED NUMBER OF INTERNAL PARTS
3	PRODUCT RATED UP TO 200 PSI; HYDROSTATICALLY TESTED AT 400 PSI
4	AVAILABLE IN A VARIETY OF BOLT HOLE PATTERNS
5	LOW ZINC SILICON BRONZE STEMS
6	HEAVY DUTY DISC HOLDER
7	O-RING CONSTRUCTION IN STEM INSERT
8	PENT NUTS SIZES AVAILABLE; 1-1/8", 1-1/2", 1-3/4"
9	PLASTIC CAPS AVAILABLE
10	10 YEAR LIMITED WARRANTY
11	VARIOUS OUTSIDE FINISHES AVAILABLE
12	NOZZLE THREADS CONFORM TO NFPA 1963, NH/NST
13	
14	
15	

Approvals:

Date: