


No.	DESCRIPTION	MATERIAL DESCRIPTION
1	BODY	CAST LOW LEAD BRASS ALLOY
2	CAP	CAST BRASS ASTM B62 ALLOY C83600
3	STEM	LOW LEAD BRASS ALLOY
4	BALL	LOW LEAD BRASS ALLOY
5	GASKET	ASTM D2000 (NITRILE)
6	SOLID PIN	AISI 303 STAINLESS STEEL
7	O-RING	ASTM D2000 (EP)
8	END PIECE	CAST LOW LEAD BRASS ALLOY
9	O-RING	ASTM D2000 (EP)
10	CONN. NUT	CAST BRASS ASTM B62 ALLOY C83600
11	CTS GSKT SUB	SBR ASTM D2000 - GSKT 410ss - BAND

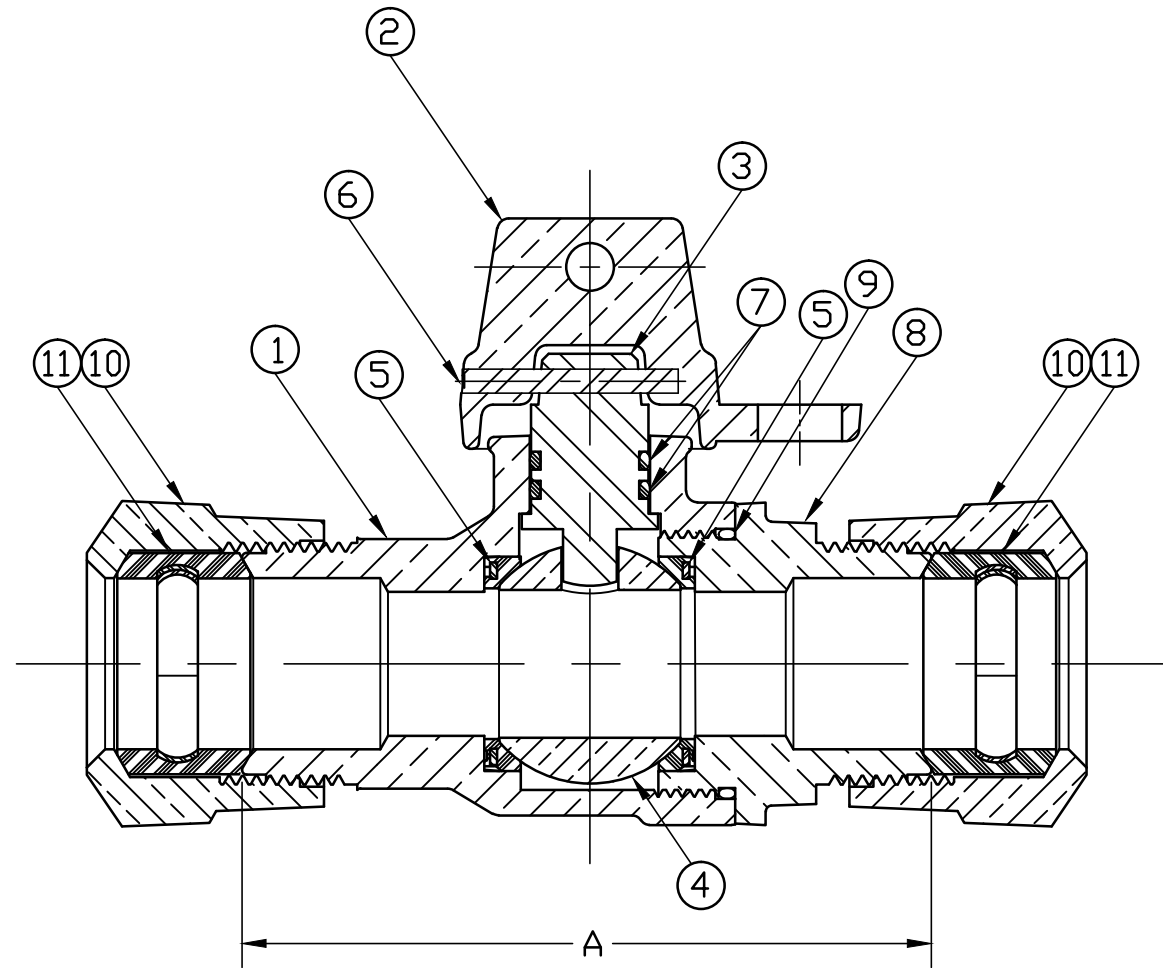

SIZE	A
3/4"	3.44
1"	5.03
1 1/2"	5.06
2"	5.52

ALL WETTED PARTS ARE LOW LEAD BRASS ALLOY

FILEPATH: PROD-ENG\JAMESJONES\SUBMITTALS\E1949WSG

						DRFTR	JGarvin	2/15/10	<b>JONES</b>	THIRD ANGLE PROJECTION 
						CHKR				
						ENGR				
						MGR				
									UNLESS OTHERWISE NOTED	REF. No.
									SURFACE PREPARATION: BREAK CORNER(S) ---- .000 SURFACE FINISH --XX RMS	
									TOLERANCE(S): LINEAR ----- ± .000 ANGULAR ----- ± 0°00'	
						STK No:				
						MAT'L:				
						DESCR.	BALL TYPE LLB CURB VALVE (110 CTS × 110 CTS)			DWG NUMBER E1949WSG
REV	ECR	DESCRIPTION	DATE	BY	CHKR					

TITLE TO AND OWNERSHIP OF THIS ENGINEERING DATA REMAINS IN Mueller Co. NO USE IS TO BE MADE OF THIS DATA EXCEPT AS SPECIFICALLY AUTHORIZED BY Mueller Co. ASSENT ON THE PART OF THE RECIPIENT TO THESE CONDITIONS IS PRESUMED.

DWG NUMBER  
E1949WSG  
JJ-MRKTING