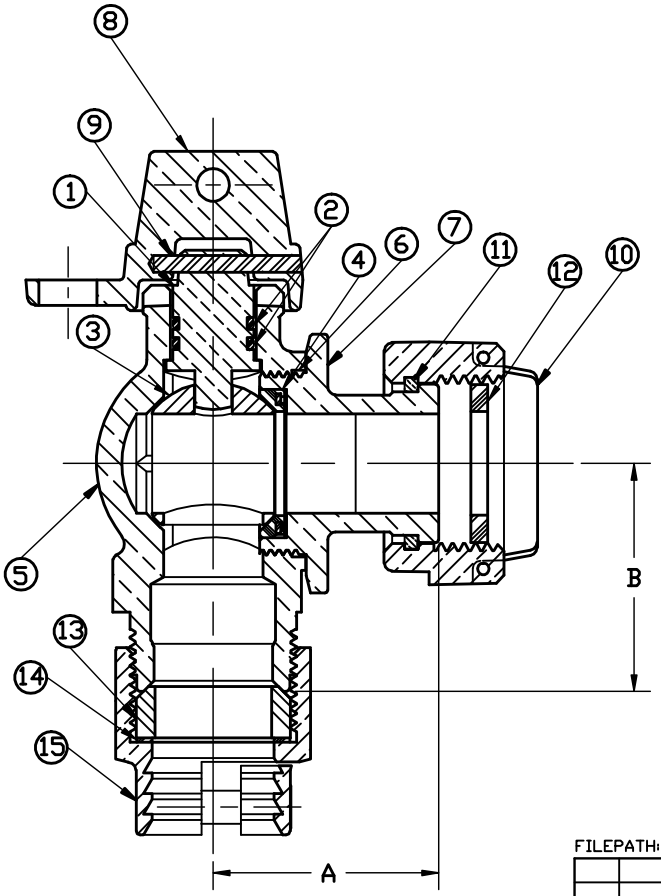

No.	DESCRIPTION	MATERIAL
1	STEM	CAST BRASS ASTM B62 ALLOY C83600
2	O-RING	EPDM D2000
3	BALL	CAST BRASS ASTM B62 ALLOY C83600
4	GASKET - SEAL	NITRILE D2000
5	BODY	CAST BRASS ASTM B62 ALLOY C83600
6	O-RING	EPDM D2000
7	END PIECE	CAST BRASS ASTM B62 ALLOY C83600
8	CAP	CAST BRASS ASTM B62 ALLOY C83600
9	SOLID PIN	AISI 303 STAINLESS STEEL
10	SADDLE NUT	CAST BRASS ASTM B62 ALLOY C83600
11	SNAP RING	COPPER ALLOY CDA521
12	RUBBER GASKET	NITRILE D2000
13	PJ GASKET	BUNA-N ASTM D2000
14	PJ WASHER	POLYPROPYLENE
15	CLPG NUT SUB	CAST BRASS ASTM B62 ALLOY C83600

VALVE SIZE	A	B
5/8x3/4or3/4	1-45/64"	1-23/32"
5/8x3/4x1	1-45/64"	2-1/8"
1	1-61/64"	2-1/8"

FILEPATH: PROD-ENG\JJ\SUBMITTALS\J1963WSN

REV	ECR	DESCRIPTION	DATE	BY	CHKR

DRFTR JGarvin 3/5/08
CHKR
ENGR
MGR
BY DATE
STK No:
MAT'L:

JAMES JONES CO.

UNLESS OTHERWISE NOTED
SURFACE PREPARATION:
BREAK CORNER(S) ---- .000
SURFACE FINISH -- XX RMS
TOLERANCE(S):
LINEAR ---------- ± .000
ANGULAR --------- ± 0°00'

THIRD ANGLE PROJECTION

REF. No. | SCALE

DESCR.
ANGLE BALL VALVE CURB STOP
(MC x PJ CTS)

PART NUMBER
J1963WSN

PART NUMBER
J1963WSN
JJ-MRKTG